

# V322X

Technical-decorative luminaires

www.vulkan.eu



V3220



V3221



V3222



V3223




V3224

## Decorative luminaire family in 2 sizes for holistic lighting concepts

- ✓ Small version with five mounting possibilities for a uniform appearance across all application situations
- ✓ Luminaire family with decorative design language
- ✓ Compact design of the housing for easy installation
- ✓ Easy maintenance via separately removable electronic ballast carrier









 10-year guarantee on request

\*in preparation


### Dimensional drawing in mm

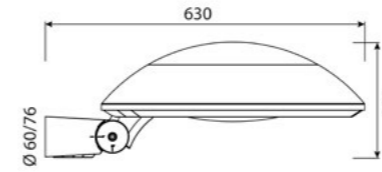


V3220

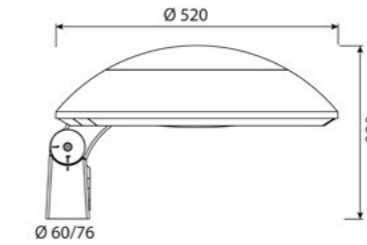


V3220

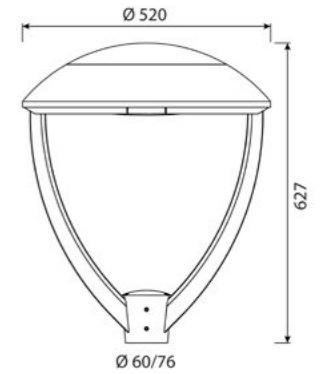

V3221

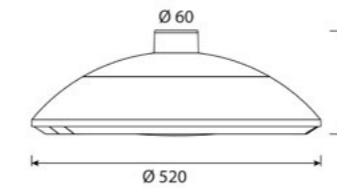

V3222

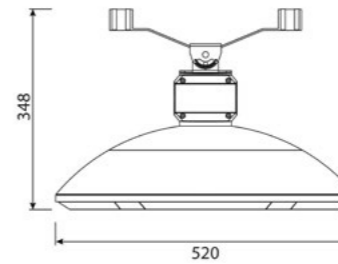

V3223



V3224

### General specifications

Enclosure	Flat single-pane tempered safety glass, partially printed on the inside in grey
Rated luminous flux	1.593 lm - 9.370 lm, L90/B10 at 100.000 h
Light colour	4.000 K, 3.000 K; others on request
Rated input power	11 W - 53 W
Protection rating	I or II
Surface vulnerable to wind	0,098 m <sup>2</sup> - 0,126 m <sup>2</sup>
Weight	approx. 12 kg - 15 kg
Finish	DB 703; others on request
Optics	Pages 24 - 26

### Additional specifications

Housing	Powder-coated, die-cast aluminium
Attachment	Spigot Ø 60 / 76 mm for Pole top- and side mounted luminaire
Light regulation	Constant Lumen Management (CLM) Autonomous performance reduction for operation in networks without a control line (Light Regulation Autarkic – LRA) Digital communication with DALI Optional: Radio-controlled Light Management System (LMS)



Find more technical details  
<https://www.vulkan.eu/en/decorative-lighting/v3221/>