

V3630



Inclination levels from 0° to + 15°



Side mounted luminaire: →
diam. 42-60 mm



↑ Pole top:
diam. 60-76 mm



Dimensional drawing in mm

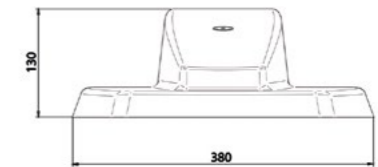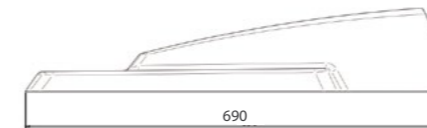

General specifications

Enclosure	Flat single-pane, tempered safety glass, partially printed on the inside in black; easy to open; quick release lock with 90° rotation, enclosure glass can be hinged towards the pole
Rated luminous flux	1.325 lm - 16.362 lm, L90/B10 for 100.000 h
Light colour	4.000 K, 3.000 K, 2.700 K, 1.800 K, others on request
Rated input power	11 W - 139 W
Protection rating	I or II
Surface vulnerable to wind	0,06 m ²
Weight	approx. 9,2 to 10,5 kg
Finish	DB 703 or RAL 7035, others on request
Accessories	See from page 80
Optics	Pages 24 - 26

Additional specifications

Housing	Powder-coated die-cast aluminium
Installation	Pole top ø 60 - 76 mm Side mounted luminaire ø 42 - 60 mm
Light regulation	Constant Lumen Management (CLM); autonomous performance reduction for operation in networks without a control line (Light Regulation Autarkic – LRA); performance reduction by switching off a control line (Light Regulation Twin – LRT); optional as "Control Ready", deliverable with Zhaga Book 18 socket and SR drive located above or under; 3 levelled lumen circuit-breaker upon request
	Digital communication with DALI
	Radio-controlled Light Management System (LMS) with monitoring, error messages, motion control and other features

One design for all applications within a city



- ✓ Flexibility in mounting on pole top and as side mounted luminaire, integrated pole flap
- ✓ Optimal for pole heights of 5 m to 12 m
- ✓ Easy opening through quick-release lock
- ✓ Components exchangeable and available as spare parts

