


V980X Flood- and Sports light




V9802


Dimensional drawing in mm

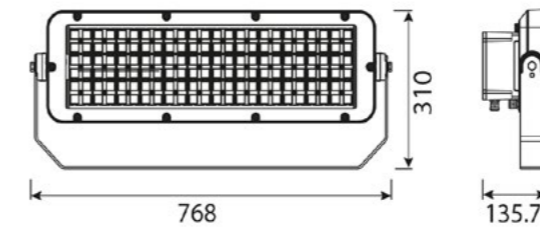


V9801

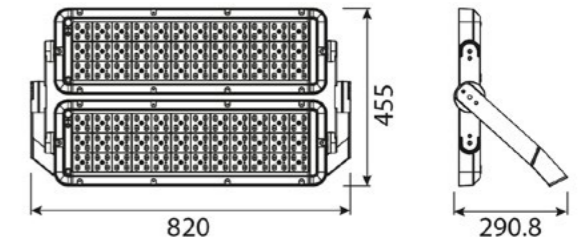

V9802

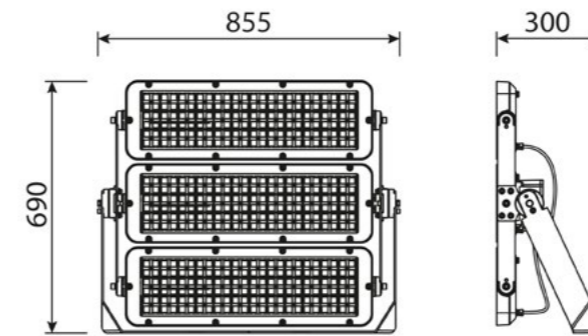

V9803

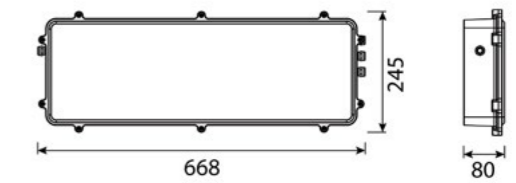

LED Driver Box



V9801

V9802

V9803

Versatile spotlight with bracket for wall or traverse mounting

- ✓ Functional headlight family with three sizes for a uniform appearance across all application situations
- ✓ Compact design for easy installation
- ✓ Mounting bracket for wall or traverse mounting, Quick adjustment for simplified angle adjustment
- ✓ ECG located in a separate LED driver box, which is detached from the housing by default, e.g. for installation on the truss or in the pole base for easy maintenance

General specifications

Enclosure	Flat single-pane tempered safety glass, partially printed on the inside in black
Rated luminous flux	29.354 lm - 162.957 lm, L90/B10 bei 100.000 h
Light colour	4.000 K; others on request
Rated input power	200 W - 1200 W
Protection rating	I or II
Surface vulnerable to wind	0,2 m ² - 0,562 m ²
Weight	approx. 22 kg - 40 kg
Finish	Vulcano grey bright, structured; others on request
Optics	Pages 24 - 26

Additional specifications

Housing	Powder-coated, die-cast aluminium
Attachment	Mounting bracket for wall or traverse mounting, quick adjustment for simplified angle adjustment
Light regulation	Constant Lumen Management (CLM)
	Autonomous performance reduction for operation in networks without a control line (Light Regulation Autarkic – LRA)
	Optional: Radio-controlled Light Management System (LMS)

10-year guarantee on request
 *in preparation



Find more technical details
<https://www.vulkan.eu/en/flood-and-sports-light/v980x/>