

V321X

Technical-decorative luminaires



V3210



V3211



V3212




V3213


Decorative luminaire family in 2 sizes for holistic lighting concepts

- ✓ Small version with four mounting possibilities for a uniform appearance across all application situations
- ✓ Luminaire family with decorative design language
- ✓ Compact design of the housing for easy installation
- ✓ Easy maintenance via separately removable electronic ballast carrier


Dimensional drawing in mm

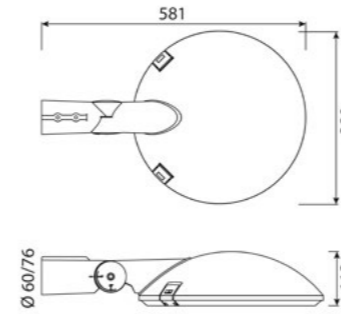


V3210

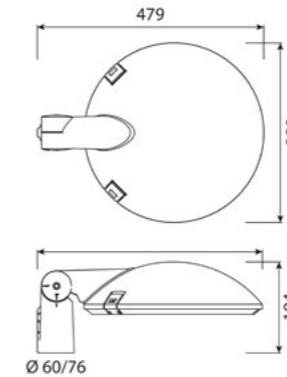



V3210

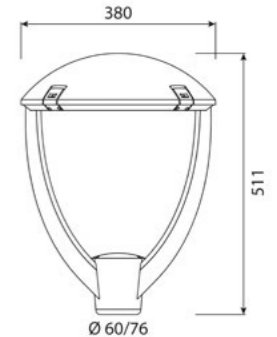

V3211

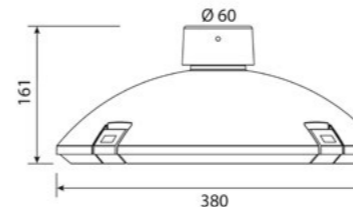

V3212

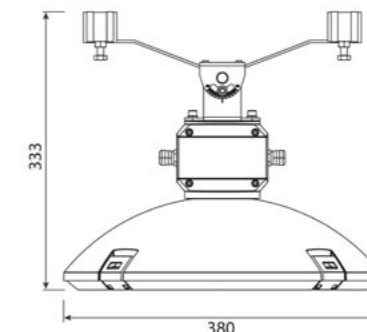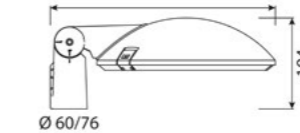

V3213

General specifications

Enclosure	Flat single-pane tempered safety glass, partially printed on the inside in grey
Rated luminous flux	1.701 lm - 8.427 lm, L90/B10 at 100.000 h
Light colour	4.000 K, 3.000 K; others on request
Rated input power	12 W - 40 W
Protection rating	I or II
Surface vulnerable to wind	0,052 m ² - 0,074 m ²
Weight	approx. 7 kg - 10 kg
Finish	DB 703; others on request
Optics	Pages 24 - 26

Additional specifications

Housing	Powder-coated, die-cast aluminium
Attachment	Spigot Ø 60 / 76 mm for Pole top- and side mounted luminaire
Light regulation	Constant Lumen Management (CLM)
	Autonomous performance reduction for operation in networks without a control line (Light Regulation Autarkic – LRA)
	Digital communication with DALI
	Optional: Radio-controlled Light Management System (LMS)



*in preparation



Find more technical details
<https://www.vulkan.eu/en/decorative-lighting/v3211/>